


Simplex Multisafe M – aft seal

General description

- 4-ring sterntube seal system for additional protection of sea water against oil pollution
- 2 sealing rings facing against sterntube oil
- Certified by all major classification societies
- Known to the market since 1993

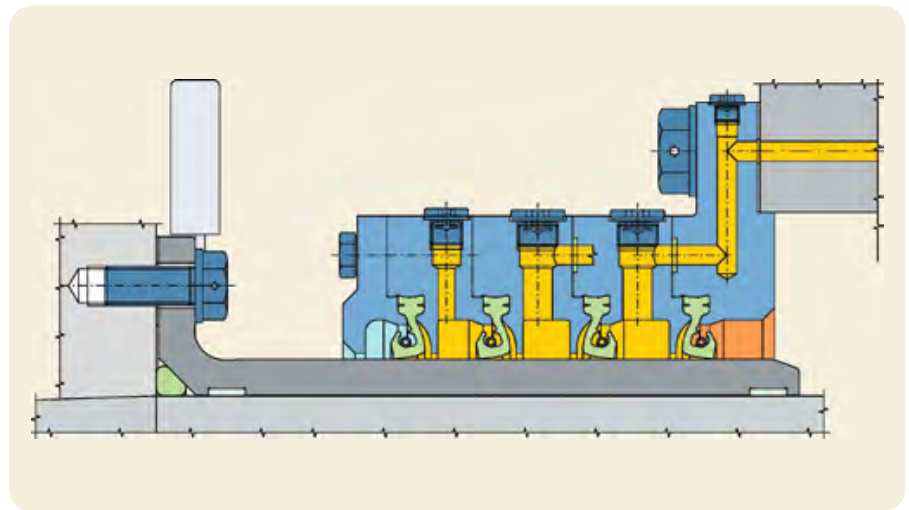

Advantages

Design

Market approved seals → reliable equipment covering the whole range of shaft diameters

Pressure controlled lubrication → greater operational reliability at higher drafts

Customised and tailor-made → meets new building and retrofit demands

Installation

Delivered fully assembled and tested → immediate and easy installation by the shipyard

Operation

Double security against oil loss escape to sea water due to the additional spare ring #3R → high security against pollution of sea water by oil

Constant pressure setting by aft seal tank → reliable operating system

Services

Designed for in-situ overhaul as per certified and approved Simplex repair standards


Worldwide service network and availability of spares

Function

- A stationary housing guides the Simplex sealing rings (2 facing water/2 facing sterntube oil). The rotating liner is fixed to the propeller.
- Oil chamber (I) is initially filled with lube oil ensuring optimal lubrication and protection from dirt.
- Oil chambers (II + III) are filled with lube oil and pressure controlled through the respective aft seal tank (B). This independent oil supply ensures best lubrication.
- Oil chambers (II + III) are connected to the aft seal tank (B) for equal pressure setting. Thus spare sealing ring (#3R) runs without load under normal operating conditions. If the sealing ring (#3) becomes damaged spare ring (#3R) can be activated by closing the shut off valve in the oil supply and vent line.
- Condition monitoring of aft seal via oil level indication of aft seal tank (B).
- Additional pipe to seal chamber (II + III) for venting and lube oil refreshment.

Functional principle of sterntube lubrications

A = Header tank with level alarm
 B = Tank of aft seal with level alarm
 C = Tank for fwd seal with level alarm
 LS = Level switch

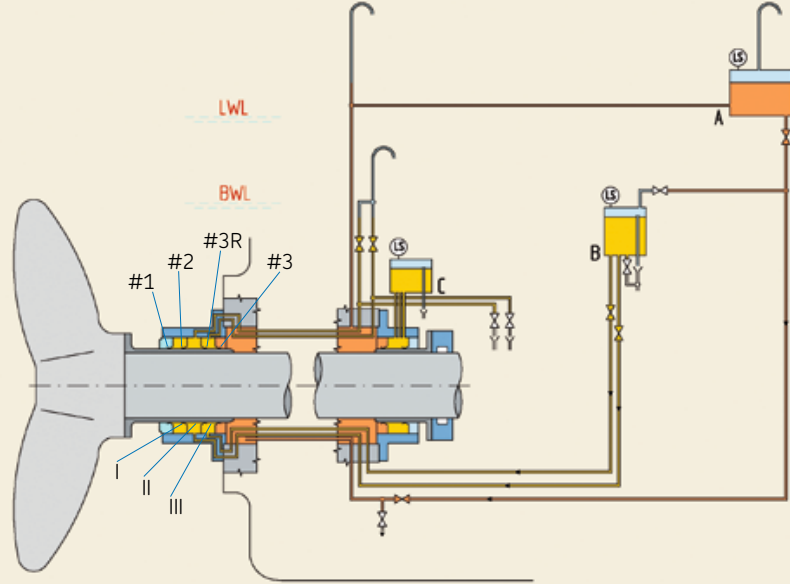

Configuration

Split design		Material housing		Liner coating		Upgrades			Distance ring	Bio oil durable
Liner	Housing	Cast iron	Bronze	Ceramic	Tungsten carbide	Grease in chamber 1	Active circulation	Net protection	Split design	e.g. for VGP 2013
<input type="radio"/>	<input type="radio"/>	<input checked="" type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>

Available/required Available on request

Customised solutions

- Ice-going vessels
- High drafts

Authorised Distributor



t: +44 1264 860186
 e: spares@simplexturbulo.com

STC is a member of SIMPLEX ENGINEERING GROUP

© SKF is a registered trademark of the SKF Group.

© SKF Group 2015

The contents of this publication are the copyright of the publisher and may not be reproduced (even extracts) unless prior written permission is granted. Every care has been taken to ensure the accuracy of the information contained in this publication but no liability can be accepted for any loss or damage whether direct, indirect or consequential arising out of the use of the information contained herein.

PUB 43/P2 14182/2 EN · September 2015

